










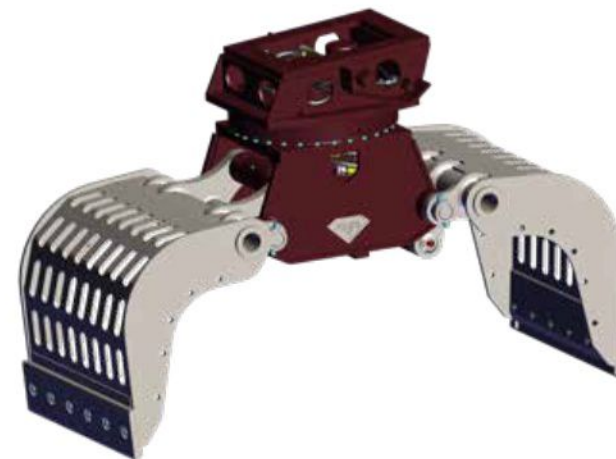


DEMOLITION GRABS












HDG SERIES












27 MODELS DEMOLITION GRABS FROM 100 TO 14.200 KGS
FOR CARRIERS FROM 0.7 ~ 240 TONS



		HDG-8R	HDG-10R	HDG-15R	HDG-25R	HDG-34R	HDG-42R	HDG-46R	HDG-52R	HDG-62R
 (1) Excavatorclass	T.	0.7 - 1.2	1 - 2	1.2 - 3	3 - 5	3.5 - 5.5	4 - 6	5 - 9	7 - 12	10 - 15
 Weight	Kg.	100	120	200	290	340	400	450	560	680
 Working pressure	Bar.	300	300	300	300	300	300	300	320	350
 Oilflow at open/close	L/min.	15	20	25	35	35	40	50	70	90
 Working pressure rotation	Bar	210	210	210	210	210	210	210	210	210
 Oilflow rotation	L/min.	5	5	10	10	10	12	12	15	15
 Shell width	mm.	300	350	450	500	500	600	700	700	600
 Spread opened	mm.	600	770	800	1160	1160	1400	1500	1550	1750
 Height	mm.	600	640	700	720	770	900	950	1000	1100
 Capacity	Ltr.	30	50	70	100	120	150	200	200	300
 Closing force	kN.	8	12	18	22	24	26	28	30	36

(1) Recommended excavator / attachment combination

		HDG-88R	HDG-110R	HDG-130R	HDG-150R	HDG-180R	HDG-210R	HDG-240R	HDG-280R	HDG-310R
 (1) Excavatorclass	T.	12 - 18	14 - 22	15 - 24	17 - 25	18 - 28	20 - 30	22 - 32	24 - 36	25 - 38
 Weight	Kg.	980	1140	1220	1380	1520	1640	1830	1980	2030
 Workingpressure	Bar.	350	350	350	350	350	350	350	350	350
 Oilflow at open/close	L/min.	100	120	120	120	150	160	170	170	170
 Workingpressure rotation	Bar	210	210	210	210	210	210	210	210	210
 Oilflow rotation	L/min.	25	25	25	25	35	35	35	35	35
 Shell width	mm.	800	800	900	1000	900	1000	1200	1200	1200
 Spread opened	mm.	1800	1950	1950	1950	2100	2100	2100	2250	2400
 Height	mm.	1200	1250	1250	1300	1500	1500	1500	1500	1500
 Capacity	Ltr.	400	500	600	700	750	800	850	900	900
 Closing force	kN.	45	50	50	50	62	68	72	80	80

		HDG-340R	HDG-380R	HDG-420R	HDG-480R	HDG-520R	HDG-580R	HDG-640R	HDG-820R	HDG-1400R
 (1) Excavatorclass	T.	28 - 42	30 - 45	32 - 52	35 - 54	42 - 64	45 - 80	50 - 85	80 - 140	120 - 240
 Weight	Kg.	2280	2840	3060	3420	4360	4700	5420	8120	14200
 Workingpressure	Bar.	350	350	350	350	350	350	350	350	350
 Oilflow at open/close	L/min.	200	200	200	200	250	250	260	320	350
 Workingpressure rotation	Bar	210	210	210	210	210	210	210	250	250
 Oilflow rotation	L/min.	35	35	35	35	40	50	60	60	100
 Shell width	mm.	1200	1200	1360	1500	1500	1500	1500	1600	1800
 Spread opened	mm.	2250	2250	2250	2450	2850	2850	3000	3500	4400
 Height	mm.	1500	1650	1650	1650	1800	1825	1850	2300	3000
 Capacity	Ltr.	950	1000	1100	1300	1500	1550	1600	2000	4600
 Closing force	kN.	90	95	100	110	148	152	155	180	220



AUSTRO Baumaschinen s.r.o.
Videňská 264/120b
619 00 Brno
obchod@austrobaumaschinen.cz
www.austrobaumaschinen.cz
+420 602 121 514